

# BlackDiamond 8800 Series Switches

with 8500/8800/8900 Series Modules



*BlackDiamond® 8800 series switches simplify the Enterprise network.*

## High Availability

- Redundant system design
- Modular ExtremeXOS® Operating System (OS) for non-stop operations
- Ethernet Automatic Protection Switching (EAPS) resiliency protocol

## High-Performance Connectivity at Low Power

- High-density gigabit and 10 Gigabit Ethernet switch
- Large switching capacity capable of supporting 2,840 Mpps
- Convergence-ready connectivity with Voice-over-IP (VoIP) automatic provisioning
- Scalable Layer 2 and Layer 3 switching with up to 512K MAC or IP addresses, and MPLS/VPLS support\*
- Low power consumption for reduced power and cooling costs

## Comprehensive Security Providing Defense-In-Depth

- Universal Port dynamic security profile to provide fine-grained security policies
- Threat detection and response instrumentation to react to network intrusion with CLEAR-Flow Security Rules Engine
- Hardened network infrastructure


*The BlackDiamond 8800 series of switches provides unparalleled investment protection. Past and current generations of modules are compatible with any BlackDiamond 8800 series chassis.*

Enterprise IT managers have limited time or resources to deal with overly complex, specialized network infrastructure solutions. BlackDiamond 8800 series switches from Extreme Networks® simplify the architecture. Purpose-built core, aggregation, edge and Data Center modules can meet your chassis needs across the network. Traditional three-tier architectures can be replaced with a streamlined two-tier network that reduces management overhead, operational complexity and capital expenditures.

BlackDiamond 8800 series switches deliver voice-class availability, high-density Power over Ethernet (PoE), Gigabit Ethernet, and 10 Gigabit Ethernet wherever it's needed. With three families of modules to choose from, the BlackDiamond 8800 series switches can support a wide variety of applications. It serves well as a high-performance Enterprise core and Data Center switch. The ports interconnect thousands of servers for High Performance Cluster Computing (HPCC). A full range of Layer 2 - 4 features for IPv4 and IPv6 allow the aggregation of high-speed connections, minimizing bottlenecks between edge and core. BlackDiamond 8800 fits well at the edge of the most demanding enterprises, with Voice-over-IP, video, wireless and data traffic. The multifaceted BlackDiamond 8800 series switches support IPv6 today, preparing the Enterprise for the future.

## Target Applications

- High-performance core switch for medium to large Enterprise networks
- High-density switch providing low-latency connections at low power for data centers and HPCC
- Cost-effective wiring closet/edge switch for small to medium enterprises

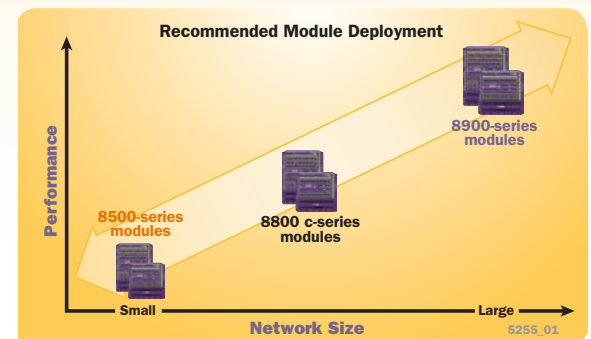

## High Availability

A high-performance network connection, whether used to connect PCs and IP telephones at the access layer or to interconnect servers in a cluster, is only useful if it is also highly available. BlackDiamond 8800 series modular switching family incorporates extensive hardware redundancy and a modular OS—ExtremeXOS—that provides the network recovery required by converged applications.

### Redundant System Design

#### Redundant Management Modules

The BlackDiamond 8800 series of modular switches are configured with an automatic failover mechanism so that if one Management Switch Module (MSM) fails, the second MSM will automatically take over management responsibility for the entire switch. This feature is critical for networks running voice and other mission-critical applications. This capability is not available for the BlackDiamond 8500-series modules.

#### Advanced Chassis Design for Availability

BlackDiamond 8800 series switches include a passive backplane complemented by high availability design elements such as isolated control and data planes, redundant controller boards for power distribution, and fan control and environmental monitoring to identify anomalies before they affect network availability.

#### Redundant Load Sharing Power Supplies

BlackDiamond 8800 series switches support a set of redundant power configurations that can load share up to six internal power supplies simultaneously. Three power supplies in a 2 + 1 redundancy configuration can power a fully loaded chassis with gigabit or 10 Gigabit Ethernet ports. In addition, without the need of an external power tray, three power supplies are available to support large PoE implementations.

#### Redundant Cooling Fans in a Hot-Swappable Fan Tray

Redundant cooling is delivered by a tray of nine fans (BlackDiamond 8810) or six fans (BlackDiamond 8806). The fan tray itself is hot swappable so the BlackDiamond 8800 series switches keep operating while the fan tray is replaced.

### Modular Operating System for Non-Stop Operations

#### True Preemptive Multitasking and Protected Memory

BlackDiamond 8800 series switches allow each of the many protocols such as Open Shortest Path First (OSPF) and Spanning Tree to run as separate OS processes that

are protected from each other. This drives increased system integrity and inherently protects against Denial of Service (DoS) attacks.

#### Process Monitoring and Restart

ExtremeXOS dramatically increases network availability using process monitoring and restart. Each independent OS process is monitored in real time. If a process becomes unresponsive or stops running, it can be automatically restarted.

#### Loadable Software Modules

The modular design of ExtremeXOS allows the upgrading of individual software modules, should this be necessary, leading to higher availability in the network (see Figure 1).

### High Availability Network Protocols

#### Ethernet Automatic Protection Switching (EAPS)

EAPS allows the IP network to provide the level of resiliency and uptime that users expect from their traditional voice networks. EAPS is superior to the Spanning Tree or Rapid Spanning Tree Protocols, offering sub-second (less than 50 milliseconds) recovery and delivering consistent failover regardless of number of VLANs, number of network nodes or network topology. In most situations, VoIP calls do not drop and digital video feeds do not freeze or pixelize because

EAPS allows the network to recover almost transparently from link failure.

#### Spanning Tree/Rapid Spanning Tree Protocols

BlackDiamond 8800 series switches support Spanning Tree (802.1D), Per VLAN Spanning Tree (PVST+), Rapid Spanning Tree (802.1w) and Multiple Instances of Spanning Tree (802.1s) protocols for Layer 2 resiliency.

#### Software Enhanced Availability

Software enhanced availability allows users to remain connected to the network even if part of the network infrastructure is down. BlackDiamond 8800 series switches constantly check for problems in the uplink connections using advanced Layer 3 protocols such as OSPF, VRRP and Extreme Standby Router Protocol™ (ESRP) (ESRP supported in Layer 2 or Layer 3), and dynamically route around the problem.

#### Equal Cost Multipath

Equal Cost Multipath enables uplinks to be load balanced for performance and cost savings while also supporting redundant failover. If an uplink fails, traffic is automatically routed to the remaining uplinks and connectivity is maintained.

#### Link Aggregation (802.3ad)

Cross-module link aggregation enables trunking of up to eight links on a single logical connection, for up to 80 Gbps of redundant bandwidth per logical connection.

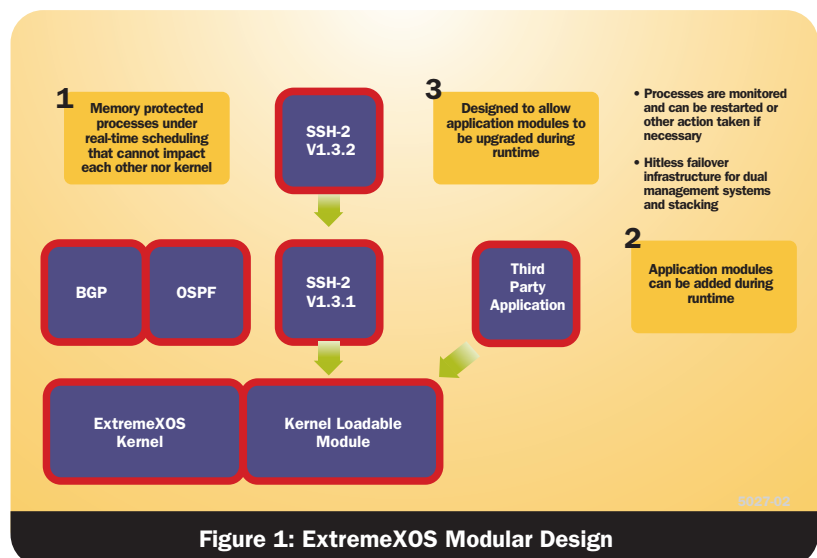


Figure 1: ExtremeXOS Modular Design

## High-Performance Connectivity

**BlackDiamond 8800 series switches deliver high-performance, cost-effective connectivity to address networking trends such as the increasing number of devices at the edge of the network: IP telephones, wireless Access Points (APs), and other devices. These networking trends drive the requirement for Gigabit Ethernet to the desktop and the use of 10 Gigabit Ethernet as an interconnect technology.**

### Large Switching Capacity

BlackDiamond 8800 series switches deliver industry leading 3.8 Tbps of switching bandwidth, and over 2,840 Mpps Layer 2 – Layer 3 hardware forwarding rate.

- 256 Gbps per slot bidirectional bandwidth
- Local switching on every I/O module

### High-Density, Line-Rate Connectivity

BlackDiamond 8800 series switches support up to 2,352 gigabit ports or up to 582 10 Gigabit Ethernet ports in a single seven-foot rack, allowing BlackDiamond 8800 series switches to deliver very cost-effective connectivity for a range of edge, aggregation, core and data center needs.

### Jumbo Frame Support

Supporting jumbo frames allows cluster computing applications to optimize network performance.

### IPv6 Packet Forwarding Support

IPv6 makes available trillions of new IP addresses and offers better address allocation, address aggregation, and features that provide significantly greater end-to-end connectivity and services. BlackDiamond 8800 series switches support IPv6 today, and enable enterprises to get ready to handle IPv6 traffic as this traffic enters their networks.

### Convergence-Ready Connectivity with VoIP Automatic Provisioning

#### Voice-Grade Connections

BlackDiamond 8800 series switches support 8 queues per port and a range of QoS technologies that can prioritize and predictably handle high-priority traffic policing or rate-limiting on ingress, 802.1q tagging and DiffServ marking, and shaping on egress. The Extreme Networks tradition of building products with low latency and jitter continues with BlackDiamond 8800 series switches, allowing network managers to build high-performance networks.

### High-Density PoE

PoE allows BlackDiamond 8800 series switches to support large IP Telephony and wireless AP deployments. BlackDiamond 8810 can support up to 333 Class 3 ports in a single 14RU chassis or can power a maximum of 432 PoE ports in a single chassis with Class 1 or 2 power. No external power trays are needed in order to power up fully loaded BlackDiamond 8800 series switches with Class 1, 2 or 3 devices.

### Link Layer Discovery Protocol (LLDP) Support

BlackDiamond 8800 series switches incorporate LLDP to simplify troubleshooting of enterprise networks and enhance the ability of network management tools to discover and maintain accurate network topologies.

### Universal Port—Voice-over-IP (VoIP) Auto Provisioning

BlackDiamond 8800 series switches set the stage for convergence applications by allowing enterprises to add new access devices in a non-disruptive plug-and-play fashion. Voice and wireless services can be easily implemented without major network upgrades. BlackDiamond 8800 series switches support automatic provisioning of VoIP using LLDP and event-based command scripting capability. It allows dynamic configuration of voice VLANs and QoS. This auto-configuration capability allows you to configure VoIP phone settings such as voice VLAN settings, call server IP address configuration, etc. This level of simplicity in managing network changes will greatly reduce operating expenses.

### Flexible Connectivity

As part of the ExtremeXOS 12.3 software release, the BlackDiamond 8800 series switches support virtualization, specifically virtual routing and dynamic movement of virtual servers. Virtual routing is also supported in the BlackDiamond 10808, BlackDiamond 12800 series, and the BlackDiamond 20808.

### Low Power Consumption

The BlackDiamond 8800 series switches typically consume 1.5 Watts (2.1 Watts maximum) per Gigabit Ethernet port and 7.0 Watts (10.4 Watts maximum) per 10 Gigabit Ethernet port. This is significantly lower than other switches in the industry, and can provide considerable savings in power and cooling costs.

### Ease of Management

Extreme Networks has developed tools that save you time and resources in managing your network. The Universal Port capability allows auto-configuration of VoIP phones, for example, providing simplicity in managing network changes. EPICenter® provides fault, configuration, accounting, performance and security functions, allowing effective management of Extreme Networks multi-layer switching equipment in a converged network.

### Investment Protection

With a wide range of available I/O and management modules, the versatile BlackDiamond 8800 series switches provide unparalleled investment protection over the product lifetime. For example, the BlackDiamond 8500-series modules can support wiring closet or small enterprise edge applications; at a later date, BlackDiamond 8800 c-series modules can be implemented to support medium-sized enterprise core deployment or aggregation. And the BlackDiamond 8900-series modules, with their high-performance and high-density, can support large enterprises or interconnection for data centers and HPC applications. The chassis provides unparalleled investment protection. Past and current generations of modules are compatible with any BlackDiamond 8800 series chassis.

Connectivity	8900-Series Modules					8800 c-Series Modules						8500-Series Modules	
	8900-10G8X-xl	8900-G48X-xl	8900-G48T-xl	8900-G96T-c	8900-10G24X-c	G24Xc	G48Te2	G48Tc	G48Xc	10G4Xc	10G8Xc	8500-G24X-e	8500-G48T-e
I/O Module Name	8900-10G8X-xl	8900-G48X-xl	8900-G48T-xl	8900-G96T-c	8900-10G24X-c	G24Xc	G48Te2	G48Tc	G48Xc	10G4Xc	10G8Xc	8500-G24X-e	8500-G48T-e
ACL Hardware Resources	60k ACLs	60k ACLs	60k ACLs	8k ACLs per 48-port block	2k ACLs per 12-port block	4k ACLs per 24-port block	1k ACLs per 24-port block	4k ACLs per 24-port block	4k ACLs per 24-port block	4k ACLs per 2-port block	4k ACLs per 2-port block	1k ACLs per 24-port block	1k ACLs per 24-port block
Policy Based Routing	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
sFlow Sampling	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware
CLEAR-Flow	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	No	No
10/100/1000 BASE-T Ports	/	/	48	96	/	/	48	48	/	/	/	/	48
PoE	/	/	S-PoE Card	/	/	/	S-PoE Card	S-PoE Card	/	/	/	/	S-PoE Card
1000X SFP Ports	/	48	/	/	/	24	/	/	48	/	/	24	/
10GBASE Ports	8 XFP	/	/	/	24 SFP+	/	/	/	/	4 XFP	8 XFP	/	/
Backplane capacity (Gbps) 2 MSM/1 MSM	128/64 [BlackDiamond 8806] 80/40 [BlackDiamond 8810]	128/64 [BlackDiamond 8806] 80/40 [BlackDiamond 8810]	128/64 [BlackDiamond 8806] 80/40 [BlackDiamond 8810]	128/64 [BlackDiamond 8806] 80/40 [BlackDiamond 8810]	128/64 [BlackDiamond 8806] 80/40 [BlackDiamond 8810]	48/24	48/24	48/24	48/24	48/24	48/24	24	24
Load Sharing Groups	128	128	128	128	128	128	128	128	128	128	128	128	128
Layer 2 MAC FDB	512k	512k	512k	32k	32k	32k	8k	32k	32k	32k	32k	8k	8k
IPv4 Longest Prefix Match (LPM) Entries	512k	512k	512k	12k	12K	12K	480	12K	12K	12K	12K	480	480
IPv4 Host Table	16k	16k	16k	8k	8k	6k	1k	6k	6k	6k	6k	1k	1k
Extended IPv4 Host Cache	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
IP Multicast (S,G,V)	6k	6k	6k	6k	6k	2k	1k	2k	2k	2k	2k	1k	1k
IPv6 Forwarding	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware	Hardware

Figure 2: Connectivity Options by I/O Module

Target Applications	8900-Series Modules					8800 c-Series Modules						8500-Series Modules	
	8900-10G8X-xl	8900-G48X-xl	8900-G48T-xl	8900-G96T-c	8900-10G24X-c	G24Xc	G48Te2	G48Tc	G48Xc	10G4Xc	10G8Xc	8500-G24X-e	8500-G48T-e
I/O Module Name	8900-10G8X-xl	8900-G48X-xl	8900-G48T-xl	8900-G96T-c	8900-10G24X-c	G24Xc	G48Te2	G48Tc	G48Xc	10G4Xc	10G8Xc	8500-G24X-e	8500-G48T-e
High-Performance Enterprise Core	✓	✓	✓		✓	✓		✓	✓	✓	✓		
Enterprise Data Centers	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓		
Traditional Aggregation Layer	✓	✓	✓		✓	✓		✓	✓	✓	✓		
High-Density Gigabit Edge				✓			✓					✓	✓
High Performance Cluster Computing	✓		✓	✓	✓			✓		✓	✓		
Single Switch Medium-Sized Network				✓			✓						
Single Switch Small-Sized Network												✓	✓

Figure 3: I/O Module by Application

MSM Module Name	8900-MSM128	8800-MSM-48c	8500-MSM24
CPU	Dual Core	Dual Core	Single Core
Switch Fabric Capacity (Gbps)	1320 – 3872	800 – 1312	800
CLEAR-Flow	Yes	Yes	No
Gigabit Uplink	Optional 8-port 1G SFP (S-G8Xc)	Optional 8-port 1G SFP (S-G8Xc)	Optional 8-port 1G SFP (S-G8Xc)
10G Uplink	Optional 1-port 10G XFP (S-10G1Xc)	Optional 1-port 10G XFP (S-10G1Xc)	Optional 1-port 10G XFP (S-10G1Xc)

Figure 4: MSM Module Options

## Comprehensive Security

Implementing a secure network means providing protection at the network perimeter as well as the core. Working together with Extreme Networks Sentriant® family of products, BlackDiamond 8800 series switches use advanced security functions in protecting your network from known or potential threats.

### Directory-Integrated Link Security

#### Network Login and Dynamic Security Profile

Network Login capability implemented in ExtremeXOS enforces user admission and usage policies. BlackDiamond 8800 series switches support a comprehensive range of Network Login options by providing an 802.1x agent-based approach, a Web-based (agentless) login capability for guests and a MAC-based authentication model for devices. With these modes of Network Login, only authorized users and devices can connect to the network and be assigned to the appropriate VLAN. The Universal Port scripting framework available in BlackDiamond 8800 series switches lets you implement Dynamic Security Profiles which, in sync with Network Login, allows you to implement fine grained and robust security policies. Upon authentication, the switch can load dynamic ACL/QoS for a user or group of users, to deny/allow access to the application servers or segments within the network.

#### Multiple Supplicant Support

Converged network designs often involve the use of shared ports for IP Telephony and wireless access. Multiple supplicant capability on a switch delivers secured access in such designs by uniquely authenticating and applying appropriate policies and VLANs for each user on a shared port.

#### Host Integrity Checking

Host integrity checking helps keep infected or non-compliant machines off the network. BlackDiamond 8800 series switches support a host integrity or endpoint integrity solution that is based on the model from the Trusted Computing Group.

BlackDiamond 8800 series switches interface with Sentriant AG200, the endpoint security software from Extreme Networks, to verify that each endpoint meets the security policies that have been set and to quarantine those that are not in compliance.

### Identity Management

Identity Management allows customers to track users who access their network. User identity is captured based on NetLogin authentication, LLDP discovery and Kerberos snooping. ExtremeXOS uses the information to then report on the MAC, VLAN, computer hostname, and port location of the user.

### Threat Detection and Response

#### CLEAR-Flow Security Rules Engine

CLEAR-Flow Security Rules Engine provides first order threat detection and mitigation, and mirrors traffic to third-party security appliances such as an IDS/IPS for further analysis of suspicious traffic in the network. CLEAR-Flow provides cost-effective scalability of security threat detection.

#### sFlow

sFlow is a sampling technology that provides the ability to sample application-level traffic flows on all interfaces simultaneously.

#### Port Mirroring

BlackDiamond 8800 series switches support many-to-one and cross module port mirroring. This can be used to mirror traffic to an external network appliance such as an intrusion detection device for trend analysis or be utilized by a network administrator as a diagnostic tool when fending off a network attack.

#### Line-Rate Access Control Lists

BlackDiamond 8800 series switches support hardware-based ACLs based on Layer 2, 3 or 4 header information such as the MAC address, IP source/destination address or TCP/UDP port number.

### Hardened Network Infrastructure

#### DoS Protection

BlackDiamond 8800 series switches handle DoS attacks gracefully. If the switch detects an unusually large number of packets in the CPU input queue, it will assemble ACLs that automatically stop these packets from reaching the CPU. After a period of time, the ACLs are removed. If the attack continues, they are reinstalled.

### Policy-Based Routing

Policy-based routing provides a flexible mechanism for network administrators to customize the flow of traffic within their networks. ACLs configured on the switch can redirect packets away from their normal path to another physical switch port. Packets are selected according to their ACL match conditions such as QoS, VLAN, IP addresses, protocol, port number or other criteria.

#### ASIC-Based Longest Prefix Match

LPM routing eliminates the need for control plane software to learn new flows and allows the network to be resilient under a DoS attack.

#### Secure Management

The use of protocols like SSH2, SCP and SNMPv3 supported by a BlackDiamond 8800 series switch prevents the interception of management communications and man-in-the-middle attacks.

#### MD5 Authentication of Routing Protocols


MD5 authentication of routing protocols prevents attackers from tampering with valid messages and attacking routing sessions.

## Target Applications

### 8500-Series Modules

#### High-Density PoE Edge Switch for the Wiring Closet


BlackDiamond 8800 series switches deliver high-performance and cost-effective connectivity driven by networking trends such as the increasing number of IP telephones, wireless APs and other devices at the edge of the network, Gigabit Ethernet connections to the desktop and the use of gigabit and 10 Gigabit Ethernet as an interconnect technology. BlackDiamond 8800 series switches allow the traditional edge layer and aggregation layer of the network to be collapsed into a single unified access layer.

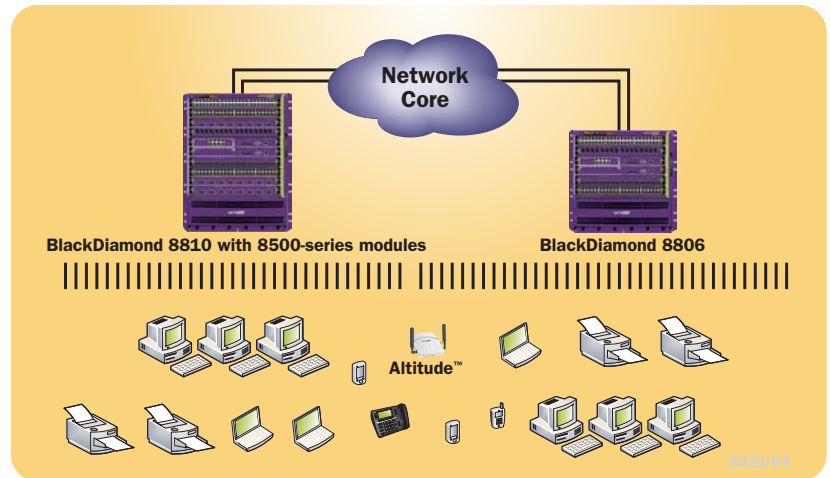

### 8800 c-Series Modules


#### Single Switch Medium-Sized Network

BlackDiamond 8800 series switches provide the small to medium enterprise with an ideal single-switch solution that satisfies their complete networking needs. The typical multi-switch network can be consolidated into a single highly available switch that delivers high-density PoE for IP Telephony, high speed performance for services and comprehensive security.

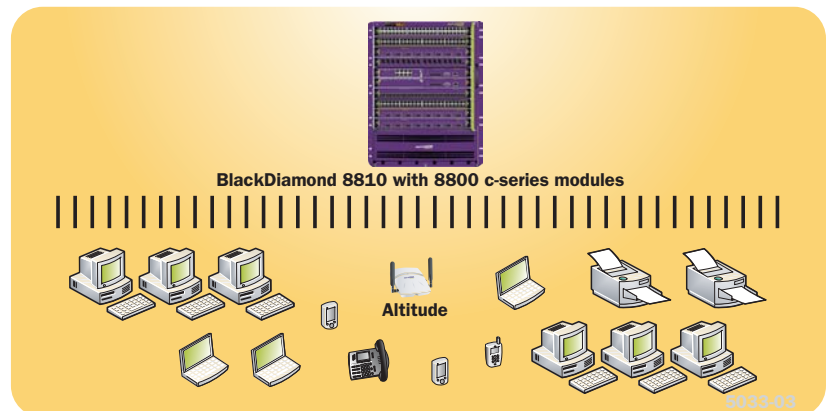

#### Traditional Aggregation Layer

While Extreme Networks believes that a two-tier network is a simpler approach, the layout of a building or campus or the wiring plant sometimes requires an aggregation layer. This layer typically aggregates gigabit or 10 gigabit uplinks from edge switches and connects up to the core through gigabit and/or 10 Gigabit Ethernet uplinks. BlackDiamond 8800 series switches provide high-density gigabit and 10 Gigabit Ethernet that is required for the aggregation layer.

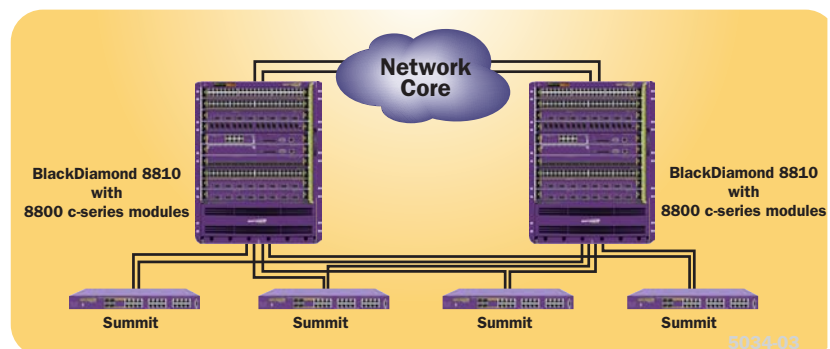


## Target Applications

### 8900-Series Modules


#### High-Performance Enterprise Core

BlackDiamond 8800 series switches provide the ideal core network for a medium-sized network with high-performance and high density 10 Gigabit Ethernet and Gigabit Ethernet interfaces. Customers can connect up to 192 10 gigabit ports or 768 gigabit ports in a single 14RU BlackDiamond 8810 system.

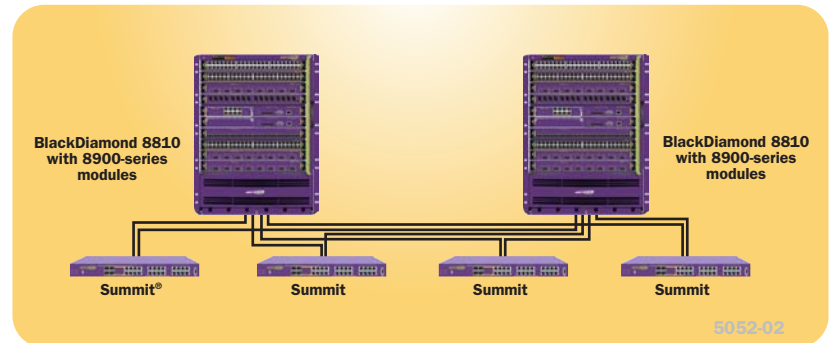


#### Enterprise Data Centers

High-performance 1 gigabit and 10 gigabit-connectivity at low latency and low power consumption make the BlackDiamond 8800 series a winning switching platform for data centers. The high-density allows 768 wire-speed Gigabit Ethernet ports in a single 14RU chassis at typically 1.5 Watts per port and 192 10 Gigabit Ethernet ports at typically 7.0 Watts per port. This allows customers to save on power and cooling costs while providing the superior switching performance required in the data center. To meet the needs of virtualized data centers, the BlackDiamond 8900-xl series modules can support as many as 512k virtual servers.

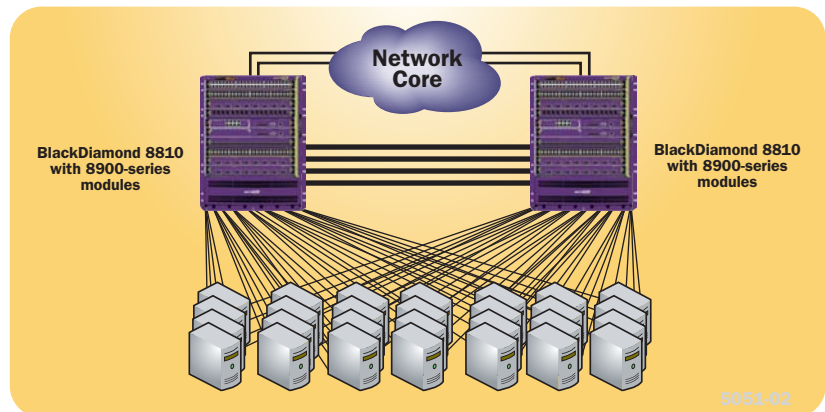

#### High Performance Cluster Computing

HPCC consists of hundreds or thousands of servers working cooperatively to solve large computational problems. With the use of relatively inexpensive and compact servers, a significant amount of processing power can be cost-effectively packed into a relatively small footprint. BlackDiamond 8800 series switches address the need for high-performance and cost-effective connectivity required for HPCC using gigabit and 10 Gigabit Ethernet as the interconnect technology.

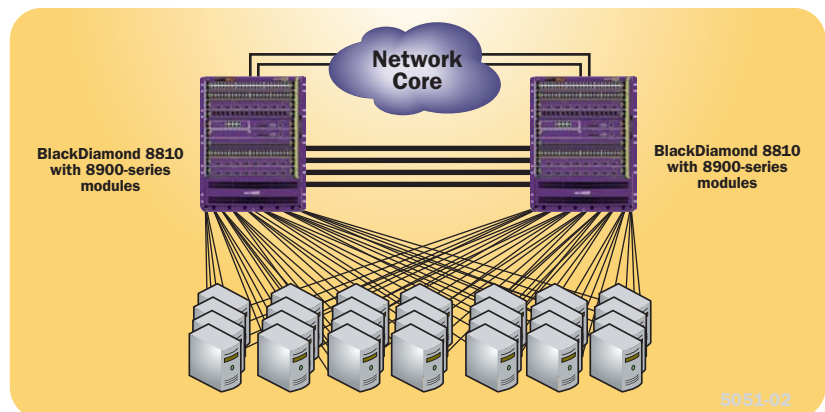

## Technical Specifications

### ExtremeXOS 12.4 Supported Protocols

#### Switching

- RFC 3619 Ethernet Automatic Protection Switching (EAPS) and EAPsv2
- IEEE 802.1D – 1998 Spanning Tree Protocol (STP)
- IEEE 802.1D – 2004 Spanning Tree Protocol (STP and RSTP)
- IEEE 802.1w – 2001 Rapid Reconfiguration for STP, RSTP
- IEEE 802.1Q – 2003 (formerly IEEE 802.1s) Multiple Instances of STP, MSTP
- EMISTP, Extreme Multiple Instances of Spanning Tree Protocol
- PVST+, Per VLAN STP (802.1Q interoperable)
- Draft-ietf-bridge-rstpmib-03.txt – Definitions of Managed Objects for Bridges with Rapid Spanning Tree Protocol
- Extreme Standby Router Protocol™ (ESRP)
- IEEE 802.1Q – 1998 Virtual Bridged Local Area Networks
- IEEE 802.3ad Static load sharing configuration and LACP based dynamic configuration
- Software Redundant Ports
- IEEE 802.1AB – LLDP Link Layer Discovery Protocol
- LLDP Media Endpoint Discovery (LLDP-MED), ANSI/TIA-1057, draft 08
- Extreme Discovery Protocol (EDP)
- Extreme Loop Recovery Protocol (ELRP)
- Extreme Link State Monitoring (ELSM)
- IEEE 802.1ag L2 Ping and traceroute, Connectivity Fault Management
- ITU-T Y.1731 Frame delay measurements

#### Management and Traffic Analysis

- RFC 2030 SNTP, Simple Network Time Protocol v4
- RFC 854 Telnet client and server
- RFC 783 TFTP Protocol (revision 2)
- RFC 951, 1542 BootP
- RFC 2131 BOOTP/DHCP relay agent and DHCP server
- RFC 1591 DNS (client operation)
- RFC 1155 Structure of Mgmt Information (SMIv1)
- RFC 1157 SNMPv1
- RFC 1212, RFC 1213, RFC 1215 MIB-II, Ethernet-Like MIB & TRAPS
- RFC 1573 Evolution of Interface
- RFC 1650 Ethernet-Like MIB (update of RFC 1213 for SNMPv2)
- RFC 1901, 1905 – 1908 SNMP v2c, SMIv2 and Revised MIB-II
- RFC 2576 Coexistence between SNMP Version 1, Version 2 and Version 3
- RFC 2578 – 2580 SMIv2 (update to RFC 1902 – 1903)
- RFC 3410 – 3415 SNMPv3, user based security, encryption and authentication
- RFC 3826 – The Advanced Encryption Standard (AES) Cipher Algorithm in the SNMP User-based Security Model
- RFC 1757 RMON 4 groups: Stats, History, Alarms and Events
- RFC 2021 RMON2 (probe configuration)
- RFC 2613 SMON MIB
- RFC 2925 Ping/Traceroute MIB

- RFC 2668 802.3 MAU MIB
- draft-ietf-hubmib-mau-mib-v3-02.txt
- RFC 1643 Ethernet MIB
- RFC 1493 Bridge MIB
- RFC 2096 IPv4 Forwarding Table MIB
- RFC 2737 Entity MIB v2
- RFC 2233 Interface MIB
- RFC 3621 PoE-MIB (PoE switches only)
- IEEE 802.1ag MIB
- Secure Shell (SSH-2) client and server
- Secure Copy (SCP-2) client and server
- Secure FTP (SFTP) server
- sFlow version 5
- Configuration logging
- Multiple Images, Multiple Configs
- RFC 3164 BSD Syslog Protocol with Multiple Syslog Servers
  - 999 Local Messages (criticals stored across reboots)
- Extreme Networks vendor MIBs (includes FDB, PoE, CPU, Memory MIBs)
- XML APIs over Telnet/SSH and HTTP/HTTPS
- Web-based device management interface – ExtremeXOS ScreenPlay™
- IP Route Compression

#### Security, Switch and Network Protection

*In 8800- and 8900-series modules only*

- Secure Shell (SSH-2), Secure Copy (SCP-2) and SFTP client/server with encryption/authentication (requires export controlled encryption module)
- SNMPv3 user based security, with encryption/authentication (see above)
- RFC 1492 TACACS+
- RFC 2138 RADIUS Authentication
- RFC 2139 RADIUS Accounting
- RFC 3579 RADIUS EAP support for 802.1x
- RADIUS Per-command Authentication
- Access Profiles on All Routing Protocols
- Access Policies for Telnet/SSH-2/SCP-2
- Network Login – 802.1x, Web and MAC-based mechanisms
- IEEE 802.1x – 2001 Port-Based Network Access Control for Network Login
- Multiple supplicants with multiple VLANs for Network Login (all modes)
- Fallback to local authentication database (MAC and Web-based methods)
- Guest VLAN for 802.1x
- RFC 1866 HTML – used for Web-based Network Login and ExtremeXOS ScreenPlay
- SSL/TLS transport – used for Web-based Network Login and ExtremeXOS ScreenPlay (requires export controlled encryption module)
- MAC Security – Lockdown and Limit
- IP Security – RFC 3046 DHCP Option 82 with port and VLAN ID
- IP Security – Trusted DHCP Server
- Layer 2/3/4 Access Control Lists (ACLs)
- RFC 2267 Network Ingress Filtering
- RPF (Unicast Reverse Path Forwarding) Control via ACLs
- Wire-speed ACLs
- Rate Limiting/Shaping by ACLs
- IP Broadcast Forwarding Control
- ICMP and IP-Option Response Control
- SYN attack protection

- CPU DoS Protection with traffic rate-limiting to management CPU
- Robust against common Network Attacks:
  - CERT (<http://www.cert.org>)
  - CA-2003-04: “SQL Slammer”
  - CA-2002-36: “SSHredder”
  - CA-2002-03: SNMP vulnerabilities
  - CA-98-13: tcp-denial-of-service
  - CA-98.01: smurf
  - CA-97.28:Teardrop\_Land -Teardrop and “LAND” attack
  - CA-96.26: ping
  - CA-96.21: tcp\_syn\_flooding
  - CA-96.01: UDP\_service\_denial
  - CA-95.01: IP\_Spoofing\_Attacks\_and\_Hijacked\_Terminal\_Connections
  - IP Options Attack
- Host Attacks
  - Teardrop, boink, opentear, jolt2, newtear, nestea, syndrop, smurf, fraggle, papasmurf, synk4, raped, winfreeze, ping -f, ping of death, pepsi5, Latierra, Winnuke, Simping, Sping, Ascend, Stream, Land, Octopus

#### Security, Router Protection

- IP Security – DHCP enforcement via Disable ARP Learning
- IP Security – Gratuitous ARP Protection
- IP Security – DHCP Secured ARP/ARP Validation
- Routing protocol MD5 authentication

#### Security Detection and Protection

*In 8800- and 8900-series modules only*

- CLEAR-Flow, threshold-based alerts and actions

#### IPv4 Host Requirements

- RFC 1122 Host Requirements
- RFC 768 UDP
- RFC 791 IP
- RFC 792 ICMP
- RFC 793 TCP
- RFC 826 ARP
- RFC 894 IP over Ethernet
- RFC 1027 Proxy ARP
- RFC 2068 HTTP server
- IGMP v1/v2/v3 Snooping with Configurable Router Registration Forwarding
- IGMP Filters
- PIM Snooping
- Static IGMP Membership
- Multicast VLAN Registration (MVR)

#### IPv4 Router Requirements

- RFC 1812 Requirements for IP Version 4 Routers
- RFC 1519 CIDR
- RFC 1256 IPv4 ICMP Router Discovery (IRDP)
- Static Unicast Routes
- Static Multicast Routes
- RFC 1058 RIP v1
- RFC 2453 RIP v2
- Static ECMP
- RFC 1112 IGMP v1
- RFC 2236 IGMP v2
- RFC 3376 IGMP v3
- RFC 2933 IGMP MIB
- RFC 2096 IPv4 Forwarding Table MIB



## Technical Specifications

### IPv4 Router Requirements continued

- RFC 1724 RIPv2 MIB
- RFC 3768 VRRPv2
- RFC 2787 VRRP MIB
- RFC 2328 OSPF v2 (Edge-mode)
- OSPF ECMP
- OSPF MD5 Authentication
- RFC 1587 OSPF NSSA Option
- RFC 1765 OSPF Database Overflow
- RFC 2370 OSPF Opaque LSA Option
- RFC 3623 OSPF Graceful Restart
- RFC 1850 OSPFv2 MIB
- RFC 2362 PIM-SM (Edge-mode)
- RFC 2934 PIM MIB
- RFC 3569, draft-ietf-ssm-arch-06.txt PIM-SSM PIM Source Specific Multicast
- draft-ietf-pim-mib-v2-01.txt
- Mtrace, a "traceroute" facility for IP Multicast: draft-ietf-idmr-traceroute-ipm-07
- Mrinfo, the multicast router information tool based on Appendix-B of draft-ietf-idmr-dvmrp-v3-11

### IPv6 Host Requirements

- RFC 5095, Internet Protocol, Version 6 (IPv6) Specification
- RFC 4861, Neighbor Discovery for IP Version 6, (IPv6)
- RFC 2463, Internet Control Message Protocol (ICMPv6) for the IPv6 Specification
- RFC 2464, Transmission of IPv6 Packets over Ethernet Networks
- RFC 2465, IPv6 MIB, General Group and Textual Conventions
- RFC 2466, MIB for ICMPv6
- RFC 2462, IPv6 Stateless Address Auto configuration – Host Requirements
- RFC 1981, Path MTU Discovery for IPv6, August 1996 – Host requirements
- RFC 3513, Internet Protocol Version 6 (IPv6) Addressing Architecture
- RFC 3587, Global Unicast Address Format
- Telnet server over IPv6 transport
- SSH-2 server over IPv6 transport
- Ping over IPv6 transport
- Traceroute over IPv6 transport

### IPv6 Interworking and Migration

- RFC 2893, Configured Tunnels
- RFC 3056, 6to4

### IPv6 Router Requirements

- RFC 2462, IPv6 Stateless Address Auto configuration – Router Requirements
- RFC 1981, Path MTU Discovery for IPv6, August 1996 – Router requirements
- RFC 2710, IPv6 Multicast Listener Discovery v1 (MLDv1) Protocol
- RFC 3810, IPv6 Multicast Listener Discovery v2 (MLDv2) Protocol
- Static Unicast routes for IPv6
- RFC 2080, RIPng
- Static ECMP

### Core Protocols for Layer 2, IPv4 and IPv6

Requires Core License or above

- EAPsv2 Shared Ports – multiple interconnections between rings
- PIM-DM Draft IETF PIM Dense Mode draft-ietf-idmr-pim-dm-05.txt, draft-ietf-pim-dm-new-v2-04.txt
- RFC 3618 Multicast Source Discovery Protocol (MSDP)
- RFC 3446 Anycast RP using PIM and MSDP
- RFC 2740 OSPFv3, OSPF for IPv6
- RFC 1771 Border Gateway Protocol 4
- RFC 1965 Autonomous System Confederations for BGP
- RFC 2796 BGP Route Reflection (supersedes RFC 1966)
- RFC 1997 BGP Communities Attribute
- RFC 1745 BGP4/IDRP for IP-OSPF Interaction
- RFC 2385 TCP MD5 Authentication for BGPv4
- RFC 2439 BGP Route Flap Damping
- RFC 2918 Route Refresh Capability for BGP-4
- RFC 3392 Capabilities Advertisement with BGP-4
- RFC 4360 BGP Extended Communities Attribute
- RFC 4486 Subcodes for BGP Cease Notification message
- draft-ietf-idr-restart-10.txt Graceful Restart Mechanism for BGP
- RFC 4760 Multiprotocol extensions for BGP-4
- RFC 1657 BGP-4 MIB
- Draft-ietf-idr-bgp4-mibv2-02.txt – Enhanced BGP-4 MIB
- RFC 1195 Use of OSI IS-IS for Routing in TCP/IP and Dual Environments (TCP/IP transport only)
- RFC 2763 Dynamic Hostname Exchange Mechanism for IS-IS
- RFC 2966 Domain-wide Prefix Distribution with Two-Level IS-IS
- RFC 2973 IS-IS Mesh Groups
- RFC 3373 Three-way Handshake for IS-IS Point-to-Point Adjacencies
- RFC 3784 IS-IS Externs for Traffic Engineering (wide metrics only)
- Draft-ietf-isis-restart-02 Restart Signaling for IS-IS
- Draft-ietf-isis-ipv6-06 Routing IPv6 with IS-IS
- Draft-ietf-isis-wg-multi-topology-11 Multi Topology (MT) Routing in IS-IS

### QoS and VLAN Services

#### Quality of Service and Policies

- IEEE 802.1D – 1998 (802.1p) Packet Priority
- RFC 2474 DiffServ Precedence, including 8 queues/port
- RFC 2598 DiffServ Expedited Forwarding (EF)
- RFC 2597 DiffServ Assured Forwarding (AF)
- RFC 2475 DiffServ Core and Edge Router Functions

#### VLAN Services: VLANs, vMANs

- IEEE 802.1Q VLAN Tagging
- IEEE 802.1v: VLAN classification by Protocol and Port
- Port-based VLANs
- Protocol-based VLANs

- MAC-based VLANs
- Multiple STP domains per VLAN
- Upstream Forwarding Only/Disable Flooding
- RFC 5517 Private VLANs
- VLAN Translation
- IEEE 802.1ad Provider Bridge Network, virtual MANs (vMANs)
- vMAN Ethertype Translation/Secondary vMAN Ethertype
- Multicast Support for PVLAN
- Multicast Support for VLAN Aggregation
- VLAN Aggregation

## General Specifications

### Switching Capacity

#### BlackDiamond 8810

- 3.8 Tbps total switching capacity
- 2,840 Mpps Layer 2 HW forwarding rate
- 2,840 Mpps Layer 3 HW forwarding rate

#### BlackDiamond 8806

- 1,952 Gbps total switching capacity
- 1,420 Mpps Layer 2 HW forwarding rate
- 1,420 Mpps Layer 3 HW forwarding rate

### Port Capacity

#### BlackDiamond 8810

- 72 ports 10GBASE-X (XENPAK) (64 ports if 2 MSMs)
- 864 ports 10/100/1000BASE-T (768 ports if 2 MSMs)
- 440 ports 1000BASE-X SFP (400 ports if 2 MSMs)
- 216 ports 10GBASE-X SFP+ (192 ports if 2 MSMs)

#### BlackDiamond 8806

- 40 ports 10GBASE-X (XENPAK) (32 ports if 2 MSMs)
- 480 ports 10/100/1000BASE-T (384 ports if 2 MSMs)
- 248 ports 1000BASE-X SFP (208 ports if 2 MSMs)
- 120 ports 10GBASE-X SFP+ (96 ports if 2 MSMs)

#### Management Switch Modules

- The management and switching module contains the control path and the switch fabric for the BlackDiamond 8800

#### BlackDiamond 8900-Series Modules:

**8900-MSM128** BlackDiamond 8900 Management Switch Module, optional I/O port

#### BlackDiamond 8800 c-Series Modules:

**8800-MSM-48c** BlackDiamond 8800 Management Switch Module, optional I/O port

#### BlackDiamond 8500-Series Modules:

**8500-MSM-24** BlackDiamond 8500 Management Switch Module, optional I/O port

### I/O Module Options

#### BlackDiamond 8900-Series Modules:

- 8900-10G8X-xl** 8-port 10GBASE-X XFP
- 8900-G48T-xl** 48-port 10/100/1000BASE-T, RJ45, optional PoE
- 8900-G48X-xl** 48-port 10GBASE-X SFP
- 8900-G96T-c** 96-port 10/100/1000BASE-T Gigabit Ethernet module
- 8900-10G24X-c** 24-port 10GBASE-SFP+

## Technical Specifications

### BlackDiamond 8800 c-Series Modules:

**G24Xc** 24-port 1000BASE-X SFP

**G48Xc** 48-port 1000BASE-X SFP

**G48Tc** 48-port 10/100/1000BASE-T Gigabit Ethernet module, optional PoE card

**G48Te2** 48-port 10/100/1000BASE-T RJ-45, optional PoE card

**10G4Xc** 4-port 10GBASE-XFP

**10G8Xc** 8-port 10GBASE-XFP

### BlackDiamond 8500-Series Modules:

**8500-G24X-e** 24-port 1000BASE-X SFP

**8500-G48T-e** 48-port 10/100/1000BASE-T RJ-45, optional PoE card

### Pluggable Options

- **S-G8Xc** 8-port 1G SFP card (add-on module for MSM)
- **S-10G1Xc** 1-port 10G XFP card (add-on module for MSM)
- **S-PoE** PoE card

### IEEE 802.3 Standard

#### G48Te2, G48Tc, and 8500-G48T-e

Gigabit Ethernet modules comply with the following standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-T
- IEEE 802.3ab 1000BASE-T

#### G24X, G48Xa, G48Xc, and 8500-G24X-e

Gigabit Ethernet modules comply with the following standard

- IEEE 802.3z 1000BASE-X

### Power Supply Options

Both AC and DC power supplies are available

- AC power supplies can run from 90-264 VAC, and deliver
  - 700W at 90V to 100V, or
  - 1200W at 200V to 220V
- 48V DC power supplies deliver 1200W of power

### Power over Ethernet (PoE) 802.3af

- 333 ports with 802.3af class 0 devices supported with 6 power supplies
- 432 ports with 802.3af class 1 devices supported with 6 power supplies
- 432 ports with 802.3af class 2 devices supported with 6 power supplies
- 333 ports with 802.3af class 3 devices supported with 6 power supplies

## Physical Specifications

### Dimensions

#### BlackDiamond 8810 Chassis:

24.47" high x 17.51" wide x 18.23" deep (62.2 cm x 44.5 cm x 46.3 cm)

#### BlackDiamond 8806 Chassis:

17.5" high x 17.51" wide x 18.23" deep (44.45 cm x 44.5 cm x 46.3 cm)

### Power Supply:

4.75" high x 2.75" wide x 13.75" deep (12.1 cm x 6.99 cm x 34.9 cm)

### MSM Module Dimensions:

1.63" high x 15.26" wide x 15.25" deep (4.1 cm x 38.8 cm x 38.7 cm)

### I/O Module Dimensions:

1.63" high x 15.26" wide x 15.25" deep (4.1 cm x 38.8 cm x 38.7 cm)

### S-G8Xc and S-10G1Xc Dimensions:

1.32" high x 6.94" wide x 11.19" deep (3.35 cm x 17.63 cm x 28.42cm)

### S-PoE Card Dimensions:

1.25" high x 14.31" wide x 4.81" deep (3.18 cm x 36.35 cm x 12.22 cm)

### Weight

**BlackDiamond 8810 Chassis:** 79 lb (35.8 kg)

**BlackDiamond 8810 Chassis fully loaded (max):** 200.5 lb (90.9 kg)

**BlackDiamond 8806 Chassis:** 65 lb (29.5 kg)

**BlackDiamond 8806 Chassis fully loaded (max):** 151 lb (68.5 kg)

**Power Supply:** 7 lb (3.2 kg)

### BlackDiamond 8900-Series Modules:

- **8900-MSM128 Module:** 6.30 lb (2.86 kg)
- **8900-10G8X-xl Module:** 7.45 lb (3.37 kg)
- **8900-G48X-xl Module:** 8.50 lb (3.85 kg)
- **8900-G48T-xl Module:** 8.55 lb (3.87 kg)
- **8900-G96T-c Module:** 8.15 lb (3.7 kg)
- **8900-10G24X-c Module:** 8.35 lb (3.79 kg)

### BlackDiamond 8800 c-Series Modules:

- **MSM-48c Module:** 6.45 lb (2.93 kg)
- **S-G8Xc Card:** 2.20 lb (1.0 kg)
- **S-10G1Xc Card:** 2.10 lb (0.95 kg)
- **G48Te2 Module:** 7.75 lb (3.52 kg)
- **S-PoE Card:** 0.80 lb (0.36 kg)
- **G48Tc Module:** 7.75 lb (3.52 kg)
- **G24Xc Module:** 6.95 lb (3.15 kg)
- **G48Xc Module:** 7.55 lb (3.42 kg)
- **10G4Xc Module:** 6.50 lb (2.95 kg)
- **10G8Xc Module:** 6.91 lb (3.13 kg)

### BlackDiamond 8500-Series Modules:

- **8500-MSM24 Module:** 6.45 lb (2.93 kg)
- **8500-G48T-e Module:** 7.75 lb (3.52 kg)
- **8500-G24X-e Module:** 6.95 lb (3.15 kg)

### Power

**BlackDiamond 8810 Chassis with Fan Trays:**

55W (Heat Dissipation: 188 BTU)

**BlackDiamond 8806 Chassis with Fan Trays:**

45W (Heat Dissipation: 154 BTU)

### BlackDiamond 8900-Series Modules:

**8900-MSM128 Module:** 150W

(Heat Dissipation: 512 BTU)

**8900-10G24X-c Module:** 250W

(Heat Dissipation: 853 BTU)

**8900-G96T-c Module:** 250W

(Heat Dissipation: 699 BTU)

### BlackDiamond 8800 c-Series Modules:

**MSM-48 Module:** 150W

(Heat Dissipation: 512 BTU)

**G48Te2 Module:** 110W

(Heat Dissipation: 376 BTU)

**G48Tc Module:** 110W

(Heat Dissipation: 376 BTU)

**G48Tc Module with S-PoE card:** 110W

(Heat Dissipation: 376 BTU)

**G24Xc Module:** 100W

(Heat Dissipation: 341 BTU)

**G48Xc Module:** 125W

(Heat Dissipation: 427 BTU)

**10G4Xc Module:** 100W

(Heat Dissipation: 341 BTU)

**10G8Xc Module:** 135W

(Heat Dissipation: 461 BTU)

### BlackDiamond 8500-Series Modules:

**8500-MSM24 Module:** 150W

(Heat Dissipation: 512 BTU)

**8500-G48T-e Module:** 110W

(Heat Dissipation: 376 BTU)

**8500-G24X-e Module:** 100W

(Heat Dissipation: 341 BTU)

## Legacy Products

### Management Switch Modules:

**MSM-G8X Module:** BlackDiamond 8800 Management Switch Module, with 8 1000BASE-X SFP ports

**MSM-48 Module:** BlackDiamond 8800 Management Switch Module, no I/O port

### I/O Module Options:

**G48Pe** 48-port 10/100/1000BASE-T Gigabit Ethernet module with PoE 2:1 oversubscription

**G48T** 48-port 10/100/1000BASE-T Gigabit Ethernet module

**G48P** 48-port 10/100/1000BASE-T Gigabit Ethernet module with PoE

**G48Ta** 48-port 10/100/1000BASE-T Gigabit Ethernet module

**G48Te** 48-port 10/100/1000BASE-T Gigabit Ethernet module 2:1 oversubscription

**G24X** 24-port 1000BASE-X Gigabit Ethernet module, SFP modules required

**G48Xa** 48-port 10/100/1000BASE-T Gigabit Ethernet module, SFP modules required

**10G4X** 4-port 10GBASE-X 10 Gigabit Ethernet module, XENPAK modules required

**10G4Xa** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Ca** 4-port 10GBASE-CX4 10 Gigabit Ethernet module

**10G4Xc** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Xa** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Xc** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Xa** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Xc** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Xa** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Xc** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Xa** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Xc** 4-port 10GBASE-X Gigabit Ethernet module, XFP modules required

**10G4Ca** 4-port 10GBASE-CX4 10 Gigabit Ethernet module

## Physical Specifications

### Weight

**MSM-G8X Module:** 7.5 lb (3.1 kg)

**MSM-48 Module:** 7.5 lb (3.1 kg)

**G48Pe Module:** 6.75 lb (3.06 kg)

**G48T Module:** 7.75 lb (3.5 kg)

**G48P Module:** 8 lb (3.6 kg)

**G48Ta Module:** 6.75 lb (3.1 kg)

**G48Te Module:** 6.75 lb (3.06 kg)

**G48Xa Module:** 8 lb (3.6 kg)

**G24X Module:** 7.75 lb (3.5 kg)

**10G4X Module:** 7.75 lb (3.5 kg)

**10G4Xa Module:** 6.5 lb (2.9 kg)

**10G4Ca Module:** 6.5 lb (2.9 kg)

## Technical Specifications

### Power

**MSM-G8X Module:** 150W  
(Heat Dissipation: 512 BTU)

**MSM-48 Module:** 150W  
(Heat Dissipation: 512 BTU)

**G48Pe Module:** 120W  
(Heat Dissipation: 409 BTU)

**G48T Module:** 105W  
(Heat Dissipation: 358 BTU)

**G48P Module:** 110W  
(Heat Dissipation: 375 BTU)

**G48Ta Module:** 120W  
(Heat Dissipation: 409 BTU)

**G48Te Module:** 120W  
(Heat Dissipation: 409 BTU)

**G24X Module:** 105W  
(Heat Dissipation: 358 BTU)

**G48Xa Module:** 105W  
(Heat Dissipation: 358 BTU)

**10G4X Module:** 105W  
(Heat Dissipation: 358 BTU)

**10G4Xa Module:** 120W  
(Heat Dissipation: 409 BTU)

**10G4Ca Module:** 105W  
(Heat Dissipation: 358 BTU)

### IEEE 802.3 Standard

**G48Pe, G48T, G48P, G48Te and G48Ta** Gigabit Ethernet modules comply with the following standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-T
- IEEE 802.3ab 1000BASE-T

**MSM-G8X** Gigabit Ethernet module complies with the following standard: IEEE 802.3z 1000BASE-X

**10GX4 and 10G4Xa** 10 Gigabit Ethernet modules comply with the following standard: IEEE 802.3ae 10GBASE-X

**10G4Ca** complies with the following standard: IEEE 802.3ak 10GBASE-CX4

## Operating Specifications

### Operating Conditions

**Operating Temperature Range:** 0° C to 40° C  
(32° F to 104° F)

**Operating Humidity:** 10% to 93% relative humidity, non-condensing

**Operational Shock:** 30 m/s<sup>2</sup> (3g), 11ms, 60 Shocks

**Operational Sine Vibration:** 5-100-5 HZ @ 0.2G, 0-Peak, 01 Oct./min.

**Operational Random Vibration:** 3-500MHz @ 1.5g rms

## Regulatory/Safety Standards

### North American Safety of ITE

- UL 60950-1:2003 1st Ed., Listed Device (U.S.)
- CSA 22.2#60950-1-03 1st Ed.(Canada)
- Complies with FCC 21CFR Chapter1, Subchapter J (U.S. Laser Safety)
- CDRH Letter of Approval (U.S. FDA Approval)
- IEEE 802.3af 6-2003 Environment A for PoE Applications

### European Safety of ITE

- EN60950-1:2001+A11
- EN 60825-1+A2:2001 (Lasers Safety)
- TUV-R GS Mark by German Notified Body
- 73/23/EEC Low Voltage Directive

### International Safety of ITE

- CB Report & Certificate per IEC 60950-1:2001+All Country Deviations
- AS/NZX 60950-1 (Australia/New Zealand)

## EMI/EMC Standards

### North America EMC for ITE

- FCC CFR 47 part 15 Class A (U.S.)
- ICES-003 Class A (Canada)

### European EMC Standards

- EN 55022:1998 Class A
- EN 55024:1998 Class A – includes IEC 61000-4-2, 3, 4, 5, 6, 8, 11
- EN 61000-3-2,3 (Harmonics & Flicker) (ETSI EN 300 386:2001 (EMC Telecommunications))
- 89/336/EEC EMC Directive

### International EMC Certifications

- CISPR 22:1997 Class A (International Emissions)
- CISPR 24:1997 Class A (International Immunity)
- IEC/EN 61000-4-2 Electrostatic Discharge, 8kV Contact, 15kV Air, Criteria A
- IEC/EN 61000-4-3 Radiated Immunity 10V/m, Criteria A
- IEC/EN 61000-4-4 Transient Burst, 1kV, Criteria A
- IEC/EN 61000-4-5 Surge, 2kV, 4kV, Criteria A
- IEC/EN 61000-4-6 Conducted Immunity, 0.15-80MHz, 10V/m unmod. RMS, Criteria A
- IEC/EN 61000-4-11 Power Dips & Interruptions, >30%, 25 periods, Criteria C

### Country Specific

- VCCI Class A (Japan Emissions)
- AS/NZS 3548 ACA (Australia Emissions)
- CNS 13438:1997 Class A (BSMI-Taiwan)
- NOM/NYCE (Mexico)
- MIC Mark, EMC Approval (Korea)

### Telecom Standards

- ETSI EN 300 386:2001 (EMC Telecommunications)
- ETSI EN 300 019 (Environmental for Telecommunications)

## IEEE 802.3 Media Access Standards

- IEEE 802.3z 1000BASE-X
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3ae 10GBASE-X
- IEEE 802.3ak 10GBASE-CX4
- IEEE 802.3af Power over Ethernet

## Environmental

- EN/ETSI 300 019-2-1 v2.1.2 – Class 1.2 Storage
- EN/ETSI 300 019-2-2 v2.1.2 – Class 2.3 Transportation
- EN/ETSI 300 019-2-3 v2.1.2 – Class 3.1e Operational
- EN/ETSI 300 753 (1997-10) – Acoustic Noise
- NEBS GR-63 Issue 2 – Sound Pressure
- ASTM D3580 Random Vibration Unpackaged 1.5G

## Warranty

- Ltd. 1-year on Hardware
- 90-days on Software
- BlackDiamond 8500-Series Modules Feature a Limited Lifetime Warranty with Express Advanced Hardware Replacement. Modules include:
  - 8500-MSM24
  - 8500-G24X-e
  - 8500-G48T-e
- For warranty details, visit [www.extremenetworks.com/go/warranty](http://www.extremenetworks.com/go/warranty)

## Ordering Information

Part Number	Description	Information
41011	10-Slot Chassis	BlackDiamond 8810 10-Slot Chassis including Fan Tray
41012	6-Slot Chassis	BlackDiamond 8806 6-Slot Chassis including Fan Tray
60020	700W/1200W 100-240V PSU	BlackDiamond 10808/BlackDiamond 8800 700W/1200W 100-240V PSU
41050	600W/900W PSU	BlackDiamond 8806 600W/900W 100-240V PSU
60021	1200W -48V DC PSU	BlackDiamond 10808/BlackDiamond 8800 1200W -48V DC PSU
<b>BlackDiamond 8900-Series Modules</b>		
41231	8900-MSM128	BlackDiamond 8900 Management Switch Module, optional I/O port
41631	8900-10G8X-xl	BlackDiamond 8900 8-port 10GBASE-X, XFP
41531	8900-G48T-xl	BlackDiamond 8900 48-port 10/100/1000BASE-T, RJ45, optional PoE card
41521	8900-G48X-xl	BlackDiamond 8900 48-port 1000BASE-X, SFP
41632	8900-10G24X-c	BlackDiamond 8900 24-port 10GBASE-X SFP+
41532	8900-G96T-c	BlackDiamond 8900 96-port 10/100/1000BASE-T MRJ-21
<b>BlackDiamond 8800 c-Series Modules</b>		
41213	MSM-48c	BlackDiamond 8800 Management Switch Module, optional I/O port
41516	G48Te2	BlackDiamond 8800 48-port 10/100/1000BASE-T RJ-45, optional PoE card
41517	G48Tc	BlackDiamond 8800 48-port 10/100/1000BASE-T RJ-45, optional PoE card
41543	G24Xc	BlackDiamond 8800 24-port 1000BASE-X SFP
41544	G48Xc	BlackDiamond 8800 48-port 1000BASE-X SFP
41614	10G4Xc	BlackDiamond 8800 4-port 10GBASE-XFP
41615	10G8Xc	BlackDiamond 8800 8-port 10GBASE-XFP
<b>BlackDiamond 8500-Series Modules</b>		
41251	8500-MSM24	BlackDiamond 8500 Management Switch Module, optional I/O Port
41552	8500-G48T-e	BlackDiamond 8500 48-port 10/100/1000BASE-T RJ-45, optional PoE card
41561	8500-G24X-e	BlackDiamond 8500 24-port 1000BASE-X SFP
<b>Pluggable Options</b>		
41821	S-G8Xc	BlackDiamond 8800 8-port 1G SFP card (add-on module for MSM)
41822	S-10G1Xc	BlackDiamond 8800 1-port 10G XFP card (add-on module for MSM)
41811	S-PoE	BlackDiamond 8800 PoE card
<b>Accessories</b>		
41311	Core License	BlackDiamond 8800 ExtremeXOS Core Software Upgrade
41312*	MPLS Feature Pack	BlackDiamond 8800 ExtremeXOS MPLS Feature Pack
41111	Spare Fan Tray	BlackDiamond 8810 Spare Fan Tray
65043	Spare Fan Tray	BlackDiamond 8806 Spare Fan Tray
41112	Spare PSU/Fan Controller	BlackDiamond 8800 Spare PSU/Fan Controller Board
41121	Spare Blank Panel	BlackDiamond 8800 Spare Blank Panel
41141	Mid Mount Kit	BlackDiamond 8810 Mid Mount Kit
41151	Cable Management Clip Kit	BlackDiamond 8800 Cable Management Kit

10110	SR XENPAK Module	10 Gigabit Ethernet XENPAK Transceiver, 850 nm, up to 300 m on Multimode Fiber, SC Connector
10111	LR XENPAK Module	10 Gigabit Ethernet XENPAK Transceiver, 1310 nm, up to 10 km on Single-mode Fiber, SC Connector
10112	ER XENPAK Module	10 Gigabit Ethernet XENPAK Transceiver, 1550 nm, up to 40 km on Single-mode Fiber, SC Connector
10113	ZR XENPAK Module	10 Gigabit Ethernet XENPAK Transceiver, 1550 nm, up to 80 km on Single-mode Fiber, SC Connector
10114	LX4 XENPAK Module	10 Gigabit Ethernet WWDM XENPAK Transceiver, 1310 nm, up to 300 m on Multi-mode Fiber and up to 10 km on a SFP, 1000BASE-SX, LC Connector
10051	SX SFP	SFP, 1000BASE-SX, LC Connector
10057	1000BASE-BX-U BiDi SFP	SFP, 1000BASE-BX-D, SMF (1310 nm TX/1490 nm RX Wavelength)
10060	100FX/100LX SFP	SFP, Dual-speed 100 FX/100LX, LC Connector
10063	100FX SFP Module	SFP, 100BASE-FX MMF, LC Connector
10121	SR XFP Module	10GBASE-SR XFP Transceiver, 850nm up to 300m on Multimode Fiber, LC Connector
10122	LR XFP Module	10GBASE-LR XFP Transceiver, 1310nm, up to 10km on Single-mode Fiber, LC Connector
10124	ER XFP Module	10GBASE-ER XFP Transceiver, 1550nm up to 40km on Single-mode Fiber, LC Connector

\* Future support with optional MPLS Feature Pack, the availability of which will be communicated in a future announcement. Requires MSM128 and 8900-XL interface modules.



[www.extremenetworks.com](http://www.extremenetworks.com)

**Corporate and North America**  
 Extreme Networks, Inc.  
 3585 Monroe Street  
 Santa Clara, CA 95051 USA  
 Phone +1 408 579 2800

**Europe, Middle East, Africa and South America**  
 Phone +31 30 800 5100

**Asia Pacific**  
 Phone +65 6836 5437

**Japan**  
 Phone +81 3 5842 4011